

Data Sheet/Teknik Klavuz

860-870MHz 15dBi RFP




ANTENNA/ANTEN


MODEL	DRFA-FG15
FREQUENCY (MHz) ÇALIŞMA FREKANSI	860-870MHz
BANDWIDTH (MHz) BAND GENİŞLİĞİ (MHz)	10MHz
GAIN/KAZANÇ (dBi)	15dBi
LOBE WIDTH (°) YAYIN AÇISI (°)	Horizontal/Yatay 360° Vertical/Dikey 10.1°
VSWR/VSWR	≤1.02 @ 865 Mhz
RESISTANCE/DİRENÇ	50Ω
POLARIZATION/POLARİZE	VERTICAL/DİKET
POWER/GÜÇ(W)	50W
CONNECTOR/KONEKTÖR	N-FEMALE
DIMENSION/ÖLÇÜLER (mm)	Φ18.5*2000mm
WEIGHT/AĞIRLIK (kg)	0.96 Kg
COLOUR/RENK	WHITE
MATERIAL/MATERYAL	RFP/FİBER TUP
TEMPERATURE/SICAKLIK(°C)	-55°C~+75°C

860-870MHz 15dBi GAIN LOBE/15dBi KAZANÇ GÖSTERGE LOB


860MHz MEASURED LOBE/ÖLÇÜM LOBU

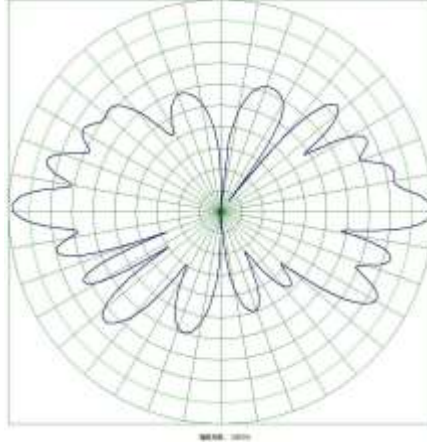


865MHz MEASURED LOBE/ÖLÇÜM LOBU

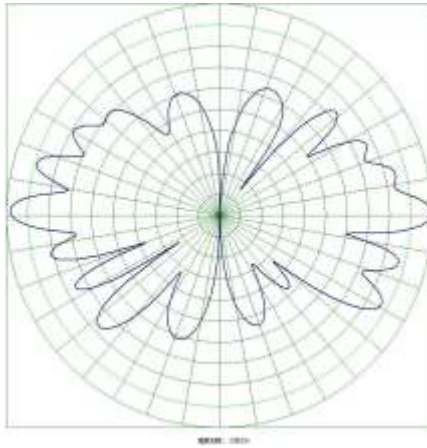

870MHz MEASURED LOBE/ÖLÇÜM LOBU

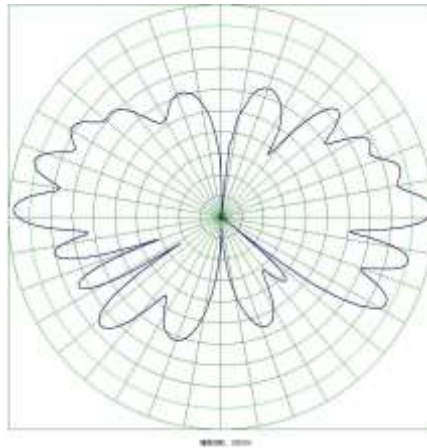

MEASURED VSWR/ VSWR ÖLÇÜM TABLOSU

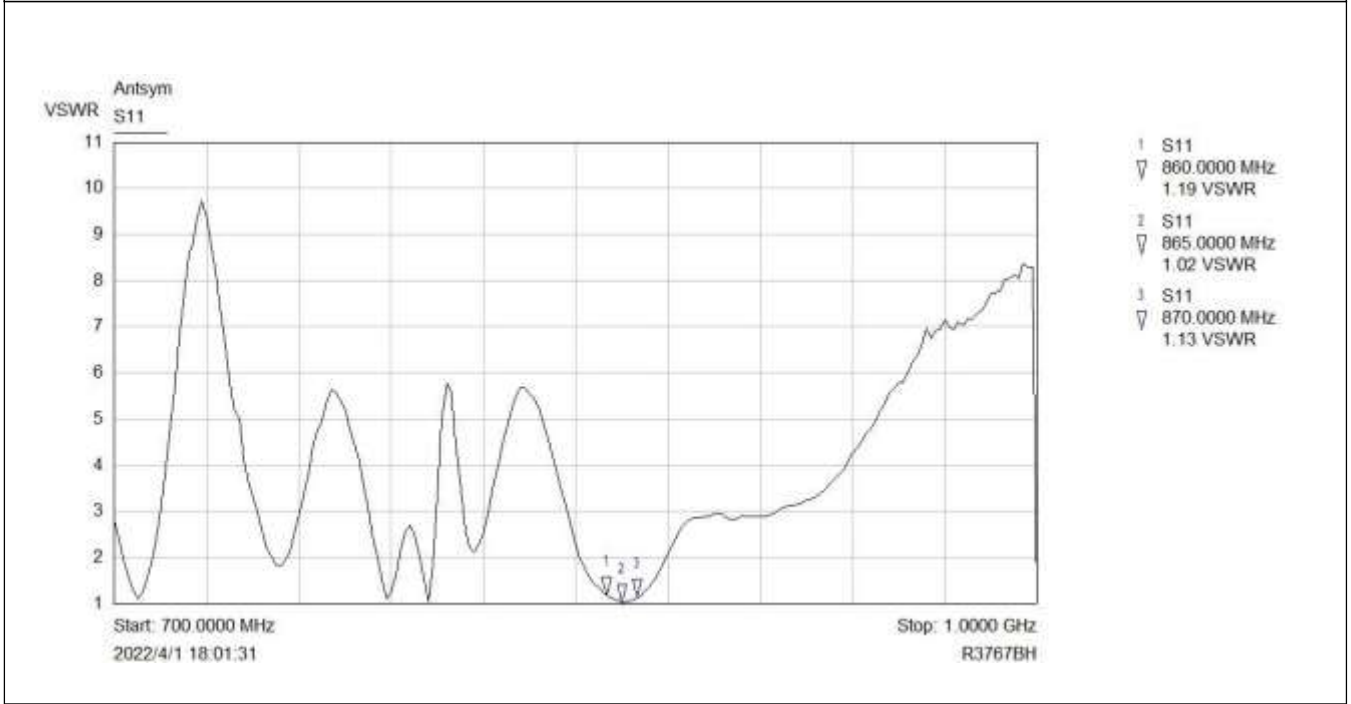

DelcomRF A.Ş. profesyonel ürünleri ile size daha yukarı taşımaya çalışır.
Satın alma linki: <https://kablosuzkontrol.net/urun/helium-miner-15-dbi-anten>